

REMACHADORAS



AR-5



RAC-180
Con succionador
de vástagos



AR-6



RAC-171
Con succionador
de vástagos



AR-600



AR-800ASK
Con succionador
de vástagos



MODELO	CAPACIDAD		DOTACIÓN BOQUILLAS	↔	KG	CONSUMO	MANGUERA	ENTRADA AIRE	P.V.P.	TIPO
	INOX	ALUM								
AR-5	4	4,8	2,4 - 3,2 - 4 - 4,8	273	1,5	110	8	1/4		○
AR-6	4	4,8	2,4 - 3,2 - 4 - 4,8	260	1,5	110	8	1/4		●
AR-600	4	4,8	2,4 - 3,2 - 4 - 4,8	260	1,3	110	8	1/4		● ●
AR-800ASK	4,8	6,4	2,4 - 3,2 - 4 - 4,8 - 6,4	270	1,8	150	8	1/4		●
RAC-180	5	6	2,4 - 3,2 - 4 - 4,8 - 6	302	2,0	110	8	1/4		● ●
RAC-171	6,4	7,8	4,8 - 6 - 6,4 - 7,8 1/4 - 5/16 Monobolt y Huck	340	2,8	150	8	1/4		● ●

REMACHADORAS, GRAPADORAS y CLAVADORAS



KJ-60



KJ-40

MODELO	CAPACIDAD		DOTACIÓN BOQUILLAS	↔	KG	CONSUMO	ENTRADA AIRE	P.V.P.	TIPO
	INOX	ALUM							
KJ 60	M8	M8	M3, M4, M5, M6, M8	288	2,1	110	1/4		● ●
KJ 40	M10	M12	M3, M4, M5, M6, M8, M10, M12	322	2,9	150	1/4		● ●



PO,8/30



F18/50



T-64

MODELO	TIPO	ALAMBRE		CAPACIDAD CARRO	↔	KG	MANGUERA	ENTRADA AIRE	P.V.P.	TIPO
		ANCHO	LARGO							
PO,8/30K	Clavo Pin	0,84	12 - 30	140	230	1	8	1/4		○
F18/50K	Clavo	1,25 x 1	15 - 50	100	250	1,4	8	1/4		○
T-64K	Clavo T	2,2	18 - 64	80	305	2,8	8	1/4		○



80/16



CF-15

MODELO	TIPO	CORONA	ALAMBRE		CAPACIDAD CARRO	↔	KG	MANGUERA	ENTRADA AIRE	P.V.P.	TIPO
			ANCHO	LARGO							
80/16K	Grapa	12,9	0,95 x 0,65	6 - 16	160	225	0,9	8	1/4		○
CF-15K	G. Corrug.	25,4	2,2	9 - 15	80	300	2,6	8	1/4		○


QUITAPUNTOS y QUITALUNAS



721



207




Equipado con broca de 8 mm

Equipado con brazo y 5 brocas


MODELO	EQUIPAMIENTO BROCAS	↔	KG	RPM	CONSUMO	MANGUERA	R	P.V.P.	TIPO
721	1 de 6,5 mm	228	1,2	1800	230	8,0	1/4		●
207	2 de 6,5mm y 3 de 8mm	228	1,2	1800	230	8,0	1/4		●●



MODELO	Ø	↔	PARA HERRAMIENTAS	P.V.P.
B-6T	6,5 mm	44 mm	207 , 721	
B-8T	8 mm	44 mm	207 , 721	

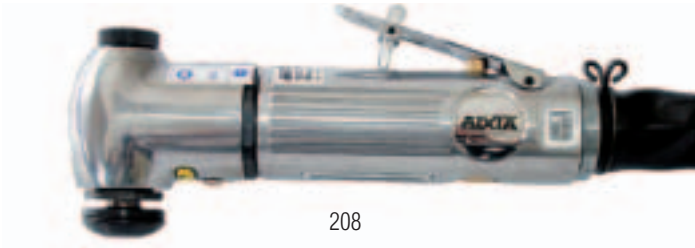

208

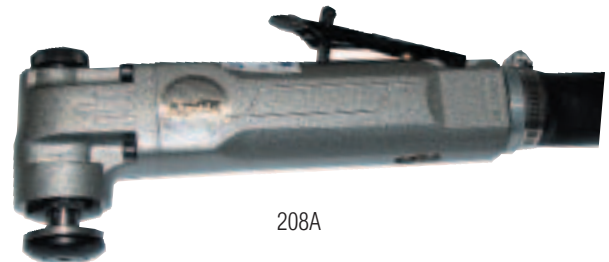

208A

MODELO	CUCHILLAS POSIBLES	KG	↔	RPM	CONSUMO	MANGUERA	R	P.V.P.	TIPO
208	073, 076, 079, 111, 140, 141	1,3	215	20000	250	8	1/4		○
208A			185						●



MODELO	↔	P.V.P.
D-073	35 mm	



MODELO	↔	P.V.P.
D-140	57 mm	



MODELO	↔	P.V.P.
D-141	90 mm	



MODELO	↔	P.V.P.
D-076	24 mm	



MODELO	↔	P.V.P.
D-079	36 mm	



MODELO	↔	P.V.P.
D-111	95 mm	