

TALADROS




FRD-6PX-3
FRD-6PX-5




FRD-6PX-7




FRD-6S

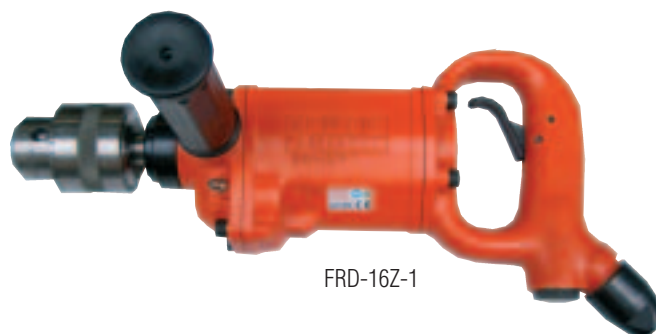

FRD-16Z-1

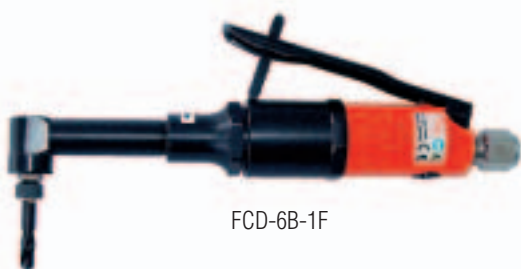

FCD-6B-1F

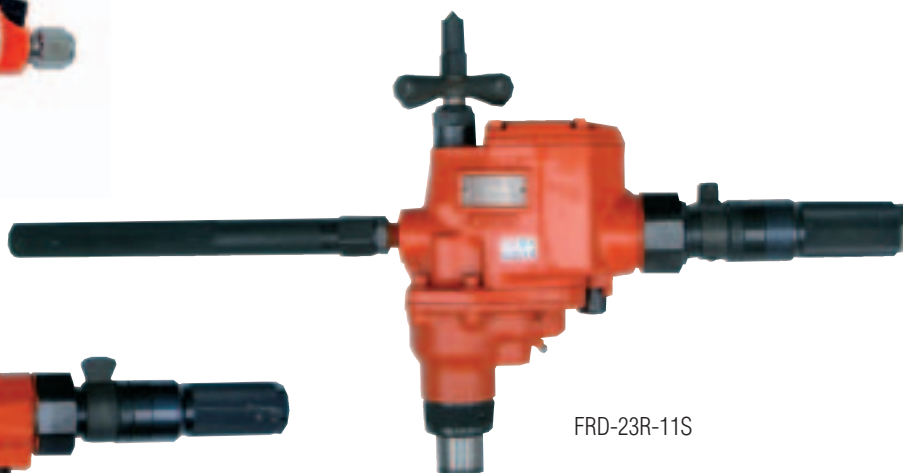

FRD-23R-11S



FCD-32R-11S

MODELO	TIPO	CAPACIDAD	POTEN. W	RPM	↔	KG	CONSUMO	MANGUERA	R	P.V.P.	TIPO
FRD-6S-2F	Recto	6	300	4300	208	0,9	340	8	1/4		●●
FRD-6S-3F		8	300	2800	208	0,9	340	8	1/4		●●
FRD-6S-5F		10	300	1300	227	1,1	340	8	1/4		●●
FRD-6S-7F		13	300	600	262	1,6	340	10	1/4		●●
FRD-6PX-3	Pistola	8	300	2800	164	1,1	340	8	1/4		●●
FRD-6PX-5		10	300	1300	187	1,3	340	8	1/4		●●
FRD-6PX-7		13	300	600	222	1,7	340	10	1/4		●●
FRD-16Z-1		16	700	800	332	3,4	1000	13	3/8		●●
FRD-23R-21S	Vertical	23	850	480	282	7,4	1200	13	1/2		●●
FRD-32R-11S		32	1000	380	353	13,0	2600	19	1/2		●●
FRD-50R-11S		50	1500	150	446	18,0	2600	19	1/2		●●
FCD-6B-1F	Acodado	6	300	2500	222	0,6	280	6	1/4		●●
FCD-23R-22S		23	850	430	472	7,0	1200	13	1/2		●●
FCD-32R-11S		32	1000	350	578	13,5	1800	19	1/2		●●
FCD-50R-11S		50	1500	150	595	16,0	1800	19	1/2		●●


TALADROS



226S



523D

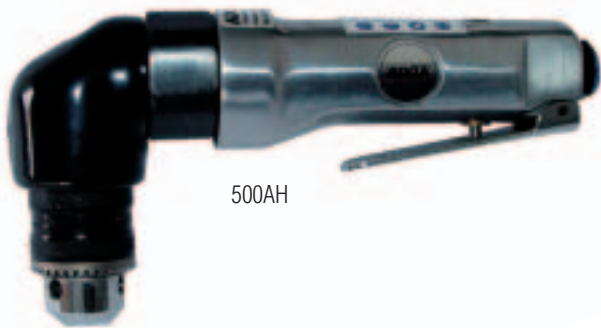

500AH



748P



250



250R
Reversible

MODELO	CAPACIDAD	PORTABROCA	POTENCIA	RPM	↔	KG	CONSUMO	MANGUERA	R	P.V.P.	TIPO
500AH	10	Llave	300 W	1900	195	0,9	300	8	1/4		○
226S	10	Rápido	300 W	2600	203	0,9	300	8	1/4		○
523D	10		300 W	3800	190	1,1	300	8	1/4		●
748P	8		300 W	4500	160	1,1	300	8	1/4		○
250	10		300 W	2000	170	1,1	300	8	1/4		○
250R	10		300 W	2000	170	1,1	300	8	1/4		○




MODELO	TIPO	CAPACIDAD	ROSCA	P.V.P.
800-0-10P	Plástico	1 - 10	3/8 - 24	
800-2-13P		1,5 - 13		



MODELO	TIPO	CAPACIDAD	ROSCA	P.V.P.
800-1-10	Metálico	1 - 10	3/8 - 24	
800-2-13		1,5 - 13		

TALADROS

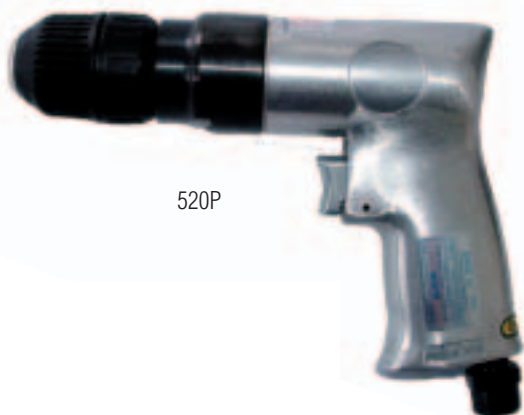

520P



530P



232P
Reversible




233P
Reversible



HDD-48
Reversible



HDD-458
Reversible

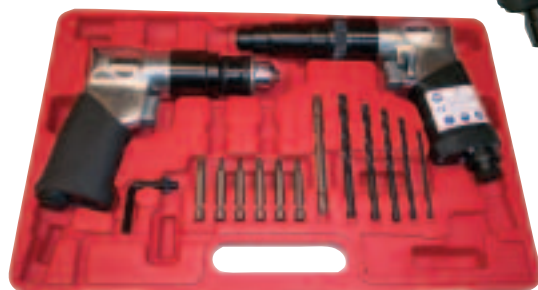

Consultar composición
y precios del kit.

MODELO	CAPACIDAD	PORTABROCA	POTENCIA	RPM	↔	KG	CONSUMO	MANGUERA	R	P.V.P.	TIPO
520P	10	Rápido	300 W	2200	165	1,0	300	8	1/4		●
232P		Rápido	300 W	1800	170	1,4	300	8	1/4		●
HDD-48		Rápido	360 W	1700	199	0,9	400	8	1/4		● ●
530P	13	Rápido	300 W	500	185	1,6	400	8	1/4		●
233P		Rápido	300 W	800	195	1,8	350	8	1/4		●
HDD-458		Rápido	360 W	750	199	0,9	350	8	1/4		● ●