

# nut splitter.



## HNS Hydraulic Nut Splitter

- Triple edge replaceable cutting blade
- Blade positioning scale to eliminate bolt damage
- Cutting depth adjusted by rotating the cylinder
- Size range from 3/4" to 3-1/2" bolt diameters
- Designed to fit BS1560/ANSI B16.5 flanges
- Special subsea versions available
- Versatile, reliable and trouble-free operation




## HYDRAULIC NUT SPLITTERS

Our Hydraulic nut splitter offers a reliable and effective solution to the removal of seized and corroded nuts.



### Specifications and Dimensional Data

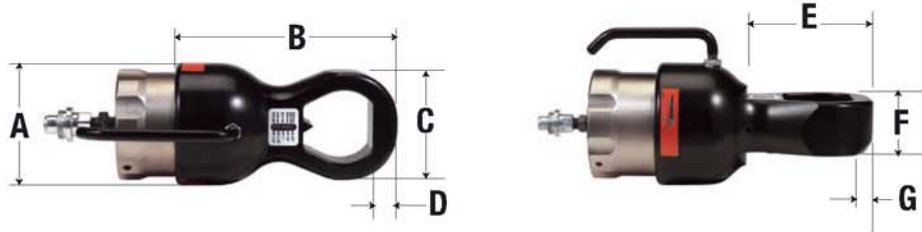

	Bolt Diameter		'A' mm	'B' mm	'C' mm	'D' mm	'E' mm	'F' mm	'G' mm	Approx Weight kg
	Imperial	Metric								
HNS1-1	3/4"	M20	104.0	228.0	76.0	18.0	104.0	40.5	9.0	6.7
	7/8"	M22								
	1"	M24 M27								
HNS1-2	3/4"	M20	104.0	239.0	90.0	21.0	110.0	40.5	10.0	6.9
	7/8"	M22								
	1"	M24 M27								
	1-1/8"	M30 M33								
HNS2-1	1-1/8"	M30	138.0	305.0	102.0	22.0	132.0	57.5	6.0	15.8
	1-1/4"	M33								
	1-3/8"	M36								
	1-1/2"	M39								
HNS2-2	1-1/8"	M30	138.0	314.0	114.0	23.0	141.0	57.5	6.0	16.0
	1-1/4"	M33								
	1-3/8"	M36								
	1-1/2"	M39								
	1-5/8"	M42 M45								
HNS3-1	1-3/4"	M45	190.0	406.0	132.0	28.0	189.0	80.5	8.0	42.0
	1-7/8"	M48								
	2"	M52								
HNS3-2	1-3/4"	M45	190.0	416.0	145.0	30.0	199.0	80.5	8.0	42.5
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
HNS3-3	1-3/4"	M45	190.0	426.0	160.0	31.5	200.0	80.5	7.0	43.0
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
	2-1/2"	M60 M64								
HNS3-4	1-3/4"	M45	190.0	437.0	174.0	35.0	204.0	80.5	9.0	44.0
	1-7/8"	M48								
	2"	M52								
	2-1/4"	M56								
	2-1/2"	M60 M64								
	2-3/4"	M68 M72								
HNS4-1	2-3/4"	M76	235.0	474.0	189.0	36.5	235.0	110.5	4.0	73.0
	3"	M80								
HNS4-2	2-3/4"	M76	235.0	495.0	219.0	41.0	240.0	110.5	3.0	75.0
	3"	M80								
	3-1/4"	M85								
	3-1/2"	M90								